


HOW TO CHOOSE THE CORRECT SIZE FOR YOUR DOOR?

Our standard size for the cover and transmission rail is 2*210cm, it is just like the picture one double leaf door shows. If door size is beyond it, or if it is single leaf door, please contact us to choose the correct size for you.



Double leaf door

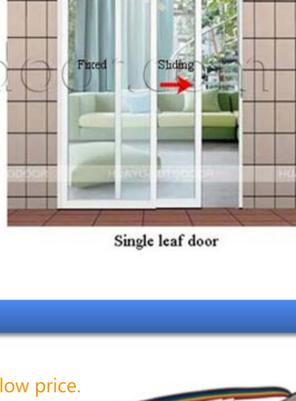


Single leaf door

FEATURES AND ADVANTAGES OF SD150B

Panasonic motor copy, same quality with low price.

The motor copy the panasonic motor, full enclosed structure ensure long service life. Advanced PWM pulse width mode providing reliable strong driving force and protect the stable operation of the product.



Built-in transformer, no need extra decoder

32 bit microprocessor in electric board make the door sliding reversely when touch obstacles;

Opening&closing parameters can be intelligently adjusted by control panel without extra programmer;

Various connectors can connect with different optional access control accessory.



Two rolling wheels, teeth belt operate more stable

Our rolling wheels have two wheels while products from other suppliers have only one.

Two rolling wheels can balance the weight of the teeth belts, finally make the teeth belt operate more stable and low operation noise,

The roller is made of polyurethane, it is durable and light.




SD 150B Roller wheel

Complete perfect access control system

Only entering the passcode or swiping card on the optional access keypad, people can be entered.


Autodoor can reach the functions of automatic/exit only/partial open/locked and open by the optional five key selector.

Various optional accessories such as foot sensor, touch sensor, push button etc. can be equipped.

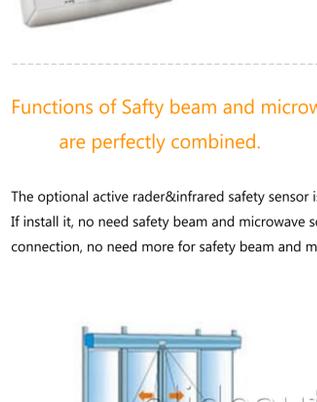

Functions of Safty beam and microwave sensor are perfectly combined.

The optional active radar&infrared safety sensor is combined the function of safety beam and microwave sensor. If install it, no need safety beam and microwave sensor. More intelligent and convenient, only need one wire connection, no need more for safety beam and microwave sensor.



Active radar&infrared safety sensor

The hydraulic rod between cover and rail make maintenance&installation easier

The hydraulic rod connect cover and rail make the opener maintenance&installation easier.

Made of thermal-break aluminium alloy, it possess better thermal insulation performance and leakproofness than normal aluminium alloy.

The black oblong plastic end panel make the openers look more beautiful, it well match up with the wood, glass door, framed or frameless door.



The hydraulic rod




The beautiful oblong plastic end panel

TECHNICAL SPECIFICATION

Model	SD 150B	
Door range	Single leaf	Double leaf
Door leaf weight	Max 160kg×1	Max 120kg×2
Door width	600~3000mm	600~1500mm
Opening speed	100~550mm/s (Adjustable)	
Closing speed	100~550mm/s (Adjustable)	
Opening time	0~9seconds	
Motor	DC24V Brushless DC Servo Motor	
Supply voltage	Input AC110V/220V; 50-60Hz	
Working temperature	-20~50°C	
Working noise	Less than 50 db	

SD150 COMPONENTS INCLUDING

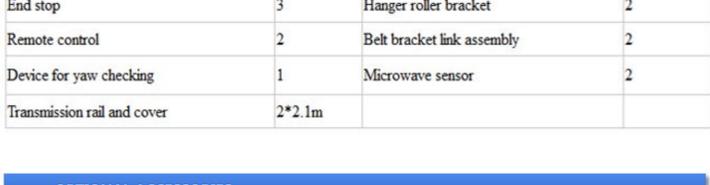


Components	Quantity	Components	Quantity
Control panel	1	Receiver	1
Motor gear box assembly	1	Return Pulley	1
Microwave sensor	2	Terminal input assembly	1
Tooth Belt	1*7m	Power switch	1
End stop	3	Hanger roller bracket	2
Remote control	2	Belt bracket link assembly	2
Device for yaw checking	1	Microwave sensor	2
Transmission rail and cover	2*2.1m		


OPTIONAL ACCESSORIES




PROFILE DRAWING




SD150 Profile



SD190 Profile



STM20-200 Profile



SD280 Profile

PROJECT FROM CUSTOMER



PACKAGING&SHIPPING



WHY CHOOSE US?



Best After Sales Service

18 months warranty, spare parts of the product can be free replaced during warranty period if any problems belong to us.



20 Years Experience

20 years always specialized in design, production, sales and installation of automatic door systems.



Strong Technical Team

Adopting Up-to-date Techniques and Technology. Highly Trained Doors Experts are the backbone of the company.



High Delivery Speed

3-5 working days shipping out for small order.



Excellent Quality

CE, ISO certification. Excellent DC brushless motor, high wear-resistant qualities wheels and reasonable structure design makes it more stable, quiet, longer life.

CONTACT US

Skype: Chinentech
Tel: +86 571 87641908
Email: jason@olideautodoor.com
MSN: Chinentech@hotmail.com

